




FABRIC-FORMED CONCRETE MATTRESSES FOR PERMANENT EROSION CONTROL AND SCOUR PROTECTION



**LEADERS IN EROSION
CONTROL AND SCOUR
PROTECTION SINCE
1990**

Synthetex is the manufacturer of HYDROTEX, a suite of sophisticated fabric-formed concrete mattresses designed to meet the most demanding erosion control and scour protection needs in modern construction.





PICTURED:

A HYDROTEX Uniform Section Concrete Mattress installed at the Cobb County Wastewater Treatment Plant in Georgia.



WHAT IS FABRIC-FORMED CONCRETE?

Fabric-formed concrete is a personalized revetment system using two layers of fabric.

The geosynthetic fabric is laid out on the ground and pumped with fine aggregate concrete, creating a mattress for different shear stress environments. One important distinction of fabric-formed concrete is that it can be installed underwater.




















WHERE IS FABRIC-FORMED CONCRETE USED?

Fabric-formed concrete is used for a wide variety of needs, including erosion control, scour protection, geomembrane protection, wastewater containment, and more.

WHY CHOOSE Hydrotex FABRIC-FORMED CONCRETE?

A product is only as good as the people behind it. From design to installation, our team of specialized engineers will be at your side. We will:

- Assist with design and hydraulic analysis
- Prescribe a customized solution for your project
- Assist with cost analyses
- Recommend qualified, experienced contractors for your project
- Provide in-person technical assistance before, during, and after installation

	 Hydrotex	Rip Rap	Prefabricated Concrete Blocks	Gabions	Geocells
Easy to Install					
Low Shipping Costs					
No Heavy Equipment					
Easy Site Access					


MORE REASONS TO CHOOSE  Hydrotex :

- » Delivered to the job site ready-to-fill
- » Requires no wood or steel formworks
- » Fully customizable
- » Less manpower needed for installation
- » Only requires a small-line concrete pump
- » Various product styles and thicknesses for various hydraulic conditions
- » High durability concrete
- » Concrete baffles to be able to fill the mattresses in controlled sections





FILTER POINT

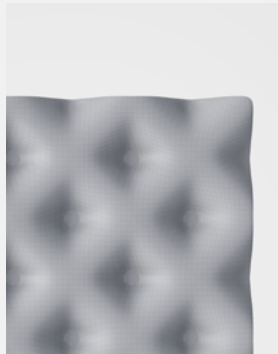

DESCRIPTION

HYDROTEX Filter Point is a concrete mattress that consists of a double-layer woven fabric joined together by spaced, interwoven filter points to form a concrete lining with a deeply cobbled surface appearance. The filter points form water permeable drains and attachment points for the control of the concrete lining thickness.

AVAILABLE THICKNESSES, IN (MM)

2.2	3	4	6	8	10	12
(55)	(75)	(100)	(150)	(200)	(250)	(300)

FEATURES

PERMEABLE - RIGID - CUSTOMIZABLE

APPLICATIONS


- Canal Lining
- Channel Lining
- Culvert / Outfall Protection
- Ditch Lining
- Downchute Protection
- Embankment Protection
- Liner Protection
- Pipeline Protection

INDUSTRIES

- Landfills
- Mining
- Municipal Water and Wastewater
- Rivers and Canals
- Roads, Highways, and Airports



ARTICULATING BLOCK

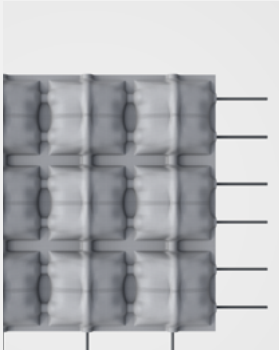

DESCRIPTION

HYDROTEX Articulating Block is a concrete mattress that consists of a series of compartments (blocks) linked by an interwoven perimeter of fabric and internal revetment cables. Ducts interconnect the compartments, and high strength revetment cables are installed between and through the compartments and ducts. The cables remain embedded in the mattress to facilitate articulation along the lines of the interwoven fabric perimeters.

AVAILABLE THICKNESSES, IN (MM)

3	4	6	8	10	12	14	16
(75)	(100)	(150)	(200)	(250)	(300)	(355)	(400)

FEATURES

PERMEABLE - FLEXIBLE - CUSTOMIZABLE



APPLICATIONS

- Bridge Abutment Protection
- Bridge Pier Scour Protection
- Canal Lining
- Channel Lining
- Embankment Protection
- Pipeline Cover
- Shoreline Revetment


INDUSTRIES

- Bridges and Piers
- Landfills
- Locks and Dams
- Marine and Coastal
- Ports and Harbors





UNIFORM SECTION

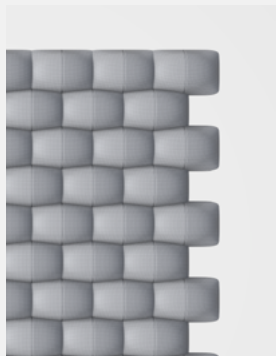

DESCRIPTION

HYDROTEX Uniform Section is a concrete mattress with a relatively uniform (constant) cross section thickness and a brick pattern surface. Uniform Section has a relatively low coefficient of hydraulic friction (Manning's *n* value) to maintain optimum water velocities. Due to its uniform cross-section, the impermeable aspect of concrete lends this product to use in applications where this feature is needed.

AVAILABLE THICKNESSES, IN (MM)

2	3	4	6	8	10	12	14	16
(50)	(75)	(100)	(150)	(200)	(250)	(300)	(355)	(400)

FEATURES


IMPERMEABLE* - RIGID - CUSTOMIZABLE

APPLICATIONS


- Canal Lining
- Coal Ash [CCR] Liner Protection
- Cooling Channels and Ponds
- Culvert / Outfall Protection
- Embankment Protection
- Liner Protection
- Pipeline Protection

INDUSTRIES

- Environmental and Containment
- Municipal Water and Wastewater
- Ports and Harbors
- Rivers and Canals
- Sediment Remediation

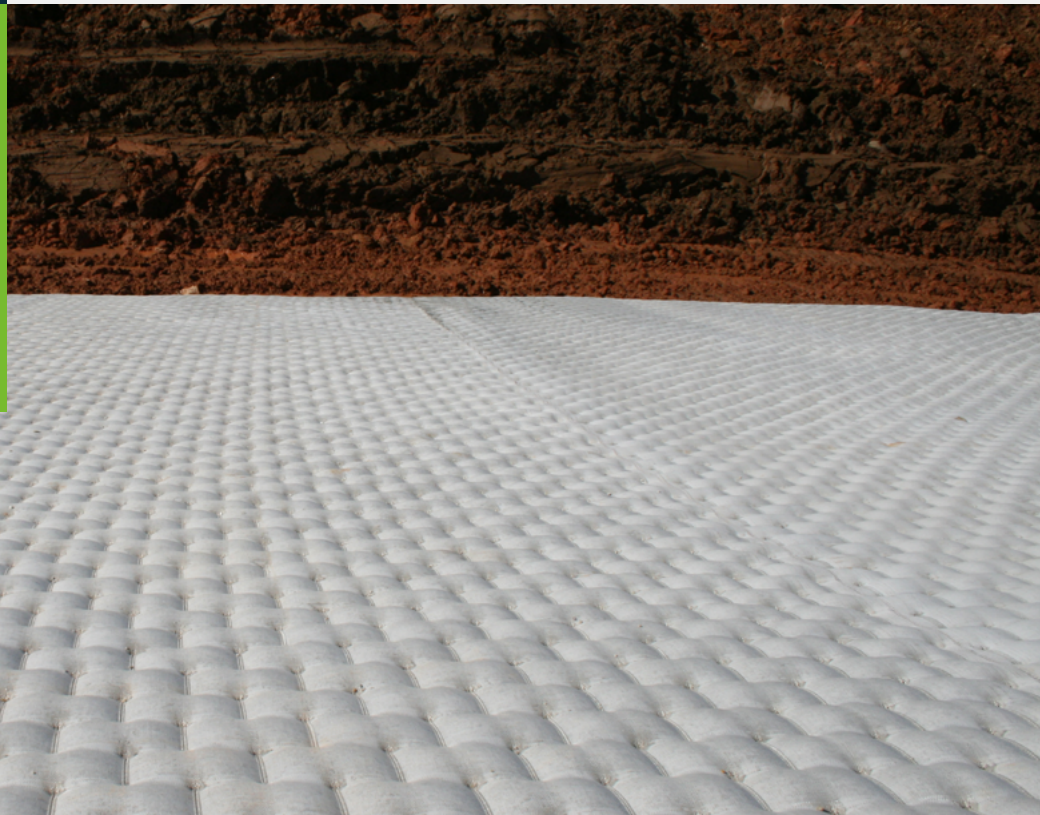

ENVIROMAT®

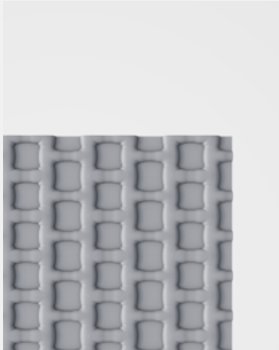

DESCRIPTION

HYDROTEX Enviromat is a concrete mattress that consists of concrete-filled elements and unfilled areas that allow vegetation. Once the concrete sets, the unfilled interwoven areas (approximately 20% of the total area of the lining) can be opened, filled with topsoil, and seeded. The Enviromat products are many times used in conjunction with a turf reinforcement mat (TRM).

AVAILABLE THICKNESSES, IN (MM)

2.5 (65)	4 (100)
-------------	------------

FEATURES

ALLOWS VEGETATION - PERMEABLE - CUSTOMIZABLE



APPLICATIONS

- Canal Lining
- Channel Lining
- Collection Channels
- Embankment Protection


INDUSTRIES

- Mining
- Rivers and Canals
- Roads, Highways, and Airports





ENVIROMAT® FX

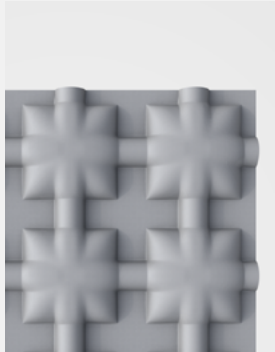

DESCRIPTION

Designed to be either cast-in-place or precast and then hoisted-in-place, Enviromat FX is a concrete mattress with unwoven filtration/vegetation perimeters around each block. Once the concrete sets, the unfilled fabric areas (nominally 30% of the total area of the lining) are used to establish vegetation as well as facilitate articulation, lifting, and placing.

APPLICATIONS

- Canal Lining
- Culvert / Outfall Protection
- Ditch Lining
- Embankment Protection

AVAILABLE THICKNESSES, IN (MM)

1
(25)

FEATURES


ALLOWS VEGETATION - PERMEABLE - CUSTOMIZABLE

INDUSTRIES

- Landfills
- Marine and Coastal
- Mining
- Rivers and Canals
- Roads, Highways, and Airports



FILTER BAND®

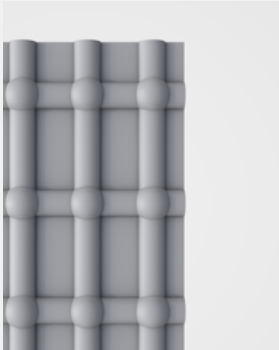

DESCRIPTION


HYDROTEX Filter Band is a concrete mattress that consists of a double-layer woven fabric joined together by spaced, interwoven filter bands, creating permeable drains for water to filter through. With alternating concrete tubes, Filter Band has a deeply textured surface appearance and achieves greater reduction of flow velocity and wave run-up due to a higher Manning's *n* value.

AVAILABLE THICKNESSES, IN (MM)

4 (100)

FEATURES

PERMEABLE - RIGID - CUSTOMIZABLE

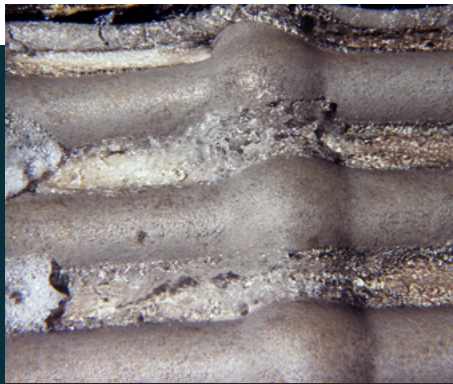

APPLICATIONS

- Canal Lining
- Channel Lining
- Culvert / Outfall Protection
- Embankment Protection



INDUSTRIES

- Mining
- Rivers and Canals
- Roads, Highways, and Airports





HYDROCAST® ARMOR UNITS

DESCRIPTION

HYDROCAST Armor Units consist of woven fabric sewn together to form custom shapes such as cubes, rectangles, or geometries that incorporate curves. When filled with fine aggregate concrete, they form a fabric-formed 3-D concrete shape with custom dimensions and volume. Self-sealing filling valves, suitable for use with an injection pipe at the end of a pump hose, are installed at predetermined locations. Custom features – such as internal steel cables, straps, or cam-lock filling ports – may be added.



AVAILABLE THICKNESSES, IN (MM)

Custom Manufactured

FEATURES


100% CUSTOM

APPLICATIONS

- Pipe Plugs
- Scour Aprons
- Shoreline Revetment
- Tunnel Closures

INDUSTRIES

- Bridges and Piers
- Locks and Dams
- Marine and Coastal

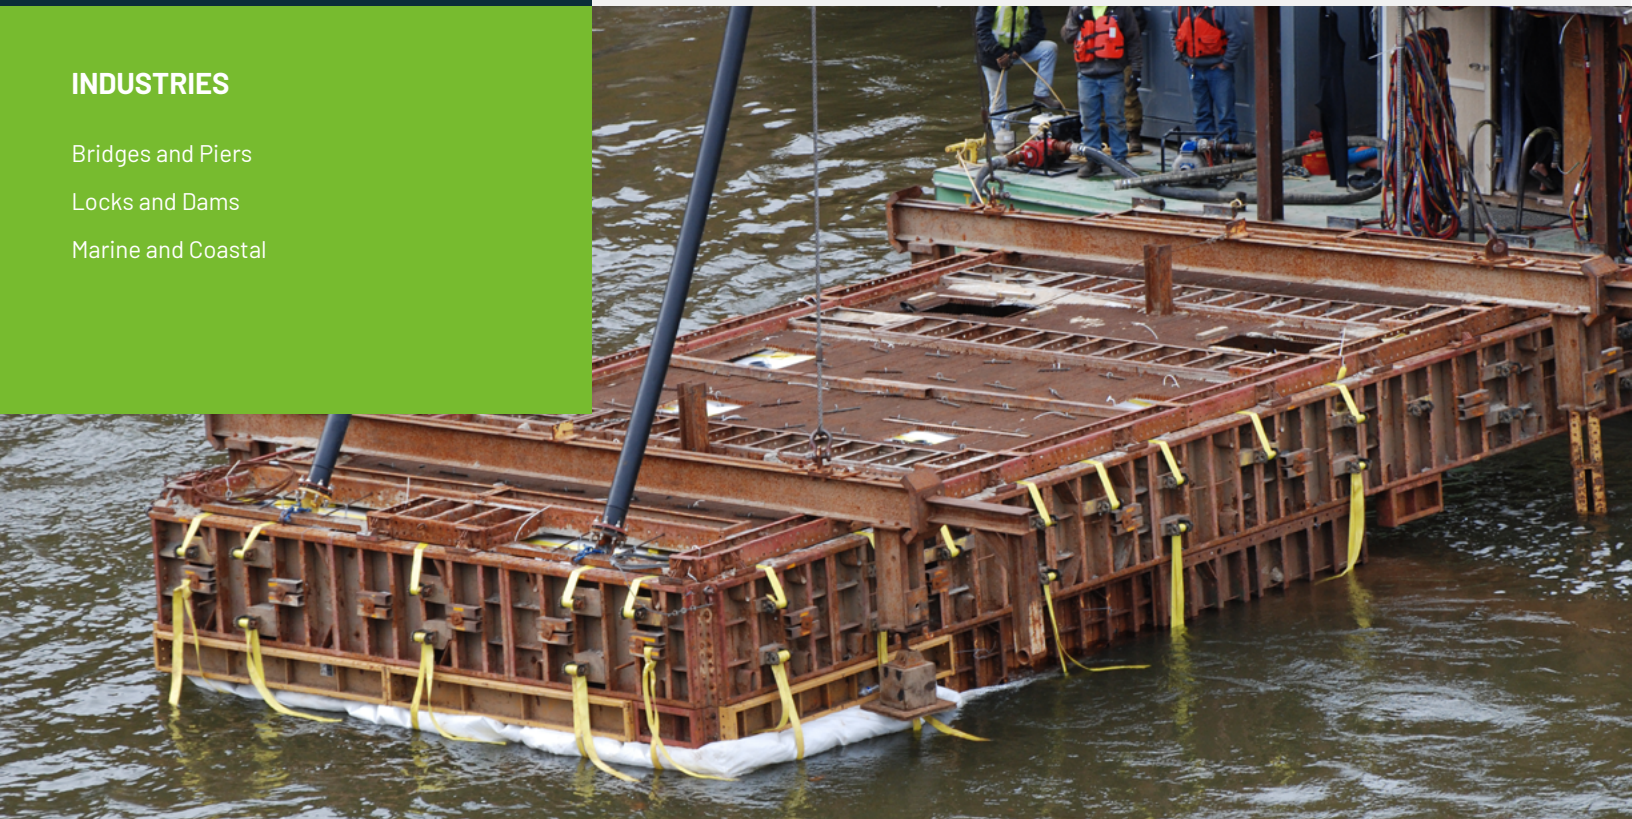

GROUT BAGS



DESCRIPTION

HYDROTEX Grout Bags consist of specially woven, double-layer synthetic forms pumped with fine aggregate concrete to create a grout bag of personalized thickness, weight, and configuration. Additional items such as tie-down straps, cut-outs around obstructions, and reinforcing cables can be incorporated into a grout bag.

AVAILABLE THICKNESSES, IN (MM)

Custom Manufactured

FEATURES

100% CUSTOM



APPLICATIONS

- Bridge Pier Scour Protection and Remediation
- Channel Lining
- Culvert / Outfall Protection
- Embankment Protection
- Prop and Thruster Scour Protection
- Scour Aprons

INDUSTRIES

- Bridges and Piers
- Locks and Dams
- Marine and Coastal



FILTER POINT

Size	Average Thickness		Mass Per Unit Area		Concrete Coverage		Filter Point Spacing	
	in	mm	lb/ft ²	kg/m ²	ft ² /yd ³	m ² /m ³	in	mm
FP220	2.2	55	25	120	136	16.6	5	125
FP300	3	75	34	165	100	12.1	6.5	165
FP400	4	100	45	220	75	9.1	8	200
FP600	6	150	68	330	50	6.1	10	255
FP800	8	200	90	440	38	4.6	12	305
FP1000	10	250	113	550	30	3.6	14	355
FP1200	12	300	135	660	25	3.0	16	405

ARTICULATING BLOCK

Size	Average Thickness		Mass Per Unit Area		Concrete Coverage	
	in	mm	lb/ft ²	kg/m ²	ft ² /yd ³	m ² /m ³
AB300	3	75	34	165	100	12.1
AB400	4	100	45	220	75	9.1
AB600	6	150	68	330	50	6.1
AB800	8	200	90	440	38	4.6
AB1000	10	250	113	550	30	3.6
AB1200	12	300	135	660	25	3.0
AB1400	14	350	158	770	22	2.6
AB1600	16	400	180	880	19	2.4

UNIFORM SECTION

Size	Average Thickness		Mass Per Unit Area		Concrete Coverage	
	in	mm	lb/ft ²	kg/m ²	ft ² /yd ³	m ² /m ³
US200	2	50	22	107	150	18.2
US300	3	75	34	165	100	12.1
US400	4	100	45	220	75	9.1
US600	6	150	68	330	50	6.1
US800	8	200	90	440	38	4.6
US1000	10	250	113	550	30	3.6
US1200	12	300	135	660	25	3.0
US1400	14	350	158	770	22	2.6
US1600	16	400	180	880	19	2.3

FILTER BAND

Size	Average Thickness		Mass Per Unit Area		Concrete Coverage		Filter Band Spacing	
	in	mm	lb/ft ²	kg/m ²	ft ² /yd ³	m ² /m ³	in	mm
FB400	4	100	45	220	75	9.1	8	200

ENVIROMAT

Size	Average Thickness		Mass Per Unit Area		Concrete Coverage		Open Vegetated Area
	in	mm	lb/ft ²	kg/m ²	ft ² /yd ³	m ² /m ³	%
EM250	2.5	65	28	138	120	14.6	20
EM400	4	100	45	220	75	9.1	20

ENVIROMAT FX

Size	Average Thickness		Mass Per Unit Area		Concrete Coverage		Open Vegetated Area
	in	mm	lb/ft ²	kg/m ²	ft ² /yd ³	m ² /m ³	
FX100	1	25	11	53.7	290	35.2	30
FX300	3	75	33	161.1	97	11.7	30

FINE AGGREGATE CONCRETE MIX DESIGN

Material	Mix Proportions		After Placement Mix Proportions	
	lb/yd ³	kg/m ³	lb/yd ³	kg/m ³
CEMENT	750 - 850	445 - 505	805 - 915	475 - 540
SAND	2120 - 2030	1255 - 1205	2290 - 2190	1355 - 1295
WATER	540 - 555	320 - 325	460 - 470	270 - 275
AIR	As Required		As Required	

Water reducers and other admixtures may be required.
All dimensions and values in tables are nominal.

5550 Triangle Parkway, Suite 220
Peachtree Corners, Georgia 30092 USA

770 399 5051 | 800 225 0023 | info@synthetex.com

www.synthetex.com

